

SMALL SECURE WALL UNIT EQUIPMENT SPECIFICATIONS

VIDEO CAMERA AND CODEC

Supported Video Endpoints

- Poly X30 or
- Poly X50



MONITOR

24" Flat LCD HDTV LCD


- 60 Hz Video Scan Rate
- HDMI Inputs



CABINET

Wall Mount Cabinet

- 14 gauge steel
- No exposed hardware
- Back of cabinet is open to accept many different connection configurations
- All components serviceable from the locking front folding hinged door
- Shatterproof Lexan protective screen - field replaceable
- Pre drilled mounting holes
- Dimensions 24" H X 32" W X 6" D
- Cooling fan and ventilation for components
- Surge protector and power strip mounted in unit
- Powder coated black with other colors optional
- Perforated stainless steel bolted behind all ventilation holes to prevent inserting objects into the unit

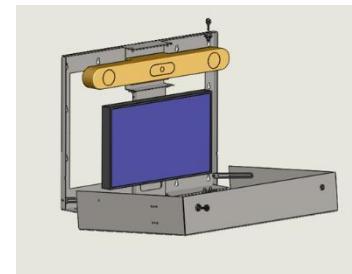

HEADSET

- High Impact ABS Plastic Handset with dynamic microphone and high strength stainless steel cord and steel lanyard (linear pull test load 1,000lbs)
- Hook switch assembly with metal cradle securely attached to the wall unit
- Armored Headset Cord Retainer
- Volume and audio output configurable from Polycom Codec
- All components easily field replaceable

